

Mixing


N33 Series.

Sanitary Finish Type



This is our New Sanitary Type Static Mixer with improved cleanability. Ease of assembly and disassembly has been improved and it is interchangeable with elements of the same size, making it easy to handle. Also, the direction of the flowing liquid is not set, allowing more freedom with installation. High-quality polished finish, inside and out.

Dimensions




Model	Nominal Diameter (ND)	Number of Elements	Outside Diameter (OD) ODmm	Inner Diameter (ID) IDmm	Thickness Tmm	Length Lmm	Mass kg
1-N33-131-F	1S	6	25.4	23.0	1.2	260	0.6
1½-N33-131-F	1½S	6	38.1	35.7	1.2	380	0.9
2-N33-131-F	2S	6	50.8	47.8	1.5	495	2.0
2½-N33-131-F	2½S	6	63.5	59.5	2.0	610	3.7
3-N33-131-F	3S	6	76.3	72.3	2.0	730	4.7
4-N33-131-F	4S	6	101.6	97.6	2.0	975	8.4

Standard Specifications

Diameter: 1S~4S (standard type)
 Material: 304S.S
 Number of Elements: 6 (standard type).
 Element Fixing: Weld to small cylinder
 Fixing: Ferrule, IDF Nut & Bolt
 Finish: Sanitary Finish (Option: Electropolished)

Model Code Chart

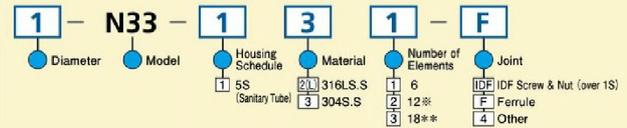

** 2, 6 element types are 2 connected. ** * 3, 6 element types are 3 connected.

N30 Series.

Sanitary Small Diameter Type




This is our small diameter sanitary type model. This carries the same specifications as those sanitary pipes used in the food industry. Installation and removal of elements are easy, making them ideal for processes that require disassembly cleaning.

Standard Specifications


Diameter: ¼"~½"
 Material: 304S.S
 Number of Elements: 12
 Element Fixing: T bar
 Fixing: Ferrule
 Finish: Sanitary Finish (Option: Electropolished)

Dimensions



Model	Nominal Diameter (ND)	Number of Elements	Outside Diameter (OD) ODmm	Inner Diameter (ID) IDmm	Thickness Tmm	Length Lmm	Mass kg
¼-N30-232-F	¼"	12	13.8	10.5	1.65	200	0.16
⅜-N30-232-F	⅜"	12	17.3	14.0	1.65	260	0.24
½-N30-232-F	½"	12	21.7	17.5	2.1	320	0.4

Model Code Chart

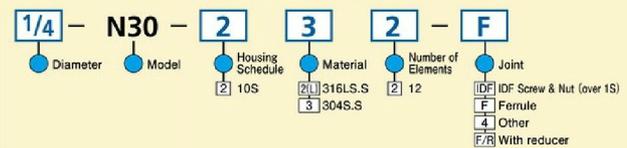


N26 Series.

Polished Finish Type



The element is fixed to the housing by an edge seal and parts exposed to liquids have a buffed finish. There is no clearance between the element and the housing. This series comes with 2 elements per module and supports disassembled inspection and cleaning. Therefore, this product is ideal for sticky materials, liquids that are easy to get between the element and housing and fiber slurry liquid processes.


Dimensions



Standard Specifications

Diameter: 2"~18"
 Material: 304S.S
 Number of Elements: 4 (2 per module)
 Element Fixing: Edge Seal (No Clearance)
 Fixing: Flange (JIS10K-FF), Ferrule
 Finish: Polished inner walls.

Model Code Chart

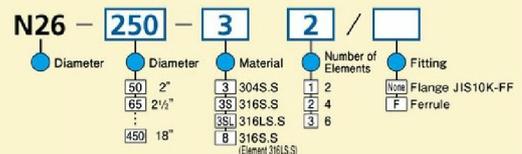

Model	Nominal Diameter (ND)	Outside Diameter (OD) ODmm	Inner Diameter (ID) IDmm	Thickness Tmm	Amm	Length Lmm	Mass kg
N26- 50-32	2"	60.5	52.7	3.9	160	322	10
N26- 65-32	2½"	76.3	65.9	5.2	220	442	16
N26- 80-32	3"	89.1	78.1	5.5	250	502	19
N26-100-32	4"	114.3	102.3	6.0	310	622	26
N26-125-32	5"	139.8	126.8	6.6	380	762	42
N26-150-32	6"	165.2	151.0	7.1	460	922	59

Model	Nominal Diameter (ND)	Outside Diameter (OD) ODmm	Inner Diameter (ID) IDmm	Thickness Tmm	Amm	Length Lmm	Mass kg
N26-200-32	8"	216.3	203.3	6.5	620	1242	91
N26-250-32	10"	267.4	254.4	6.5	770	1542	145
N26-300-32	12"	318.5	305.5	6.5	800	1602	192
N26-350-32	14"	355.6	340.0	7.8	880	1762	257
N26-400-32	16"	406.4	390.0	8.2	1000	2002	341
N26-450-32	18"	457.2	441.0	8.1	1130	2262	435